



crown head™

Mid-priced electric macerating toilet preferred by boaters since 1965. Reliable, high quality head uses sea or lake water.

Benefits

- Suitable for demanding boaters who want reliability and low maintenance on any size vessel
- Classic, proven, dependable design that has continually been improved
- Efficient flushing action – includes powerful centrifugal macerating pump
- Simple and flexible installation for mounting above or below waterline
- Easy to clean and maintain
- Built-in deodorant system
- Remanufactured pump exchange program available
- Can be used with on-board treatment systems (such as the Lectra/San) and/or holding tanks
- Each unit is assembled by hand, individually tested and backed by Raritan's one-year Limited Warranty and legendary technical support team

Options

- Available for 12, 24, 32V DC or 120/240V AC
- Choice of full-size household-style bowl or marine-size bowl
- Available in white


Raritan products are chosen by powerboat, sailboat, houseboat, and RV owners and manufacturers the world over for their dependability, environmental responsibility, simplicity of installation, operation, and maintenance. The product line includes house-hold style toilets, marine toilets, marine sanitation devices and systems, cleaning products, icemakers, water heaters, and rudder angle indicators.

To view our complete line, to obtain installation and servicing guides, visit raritaneng.com.

THE MOST DEPENDABLE NAME ON THE WATER

crown head™

Bowl Width:
14 3/8" (36.6cm)
Household
13" (33cm)
Marine



Height:
17 3/8" (44.1cm)
Household
17" (43.2cm)
Marine

Bowl Depth:
20" (50.8cm)
Household
17" (43.2cm)
Marine

Base Width:
10 7/8" (27.6cm)

The crown head was Raritan's first electric macerating toilet. Continual improvements to materials and design have made it the top choice for its quality, ruggedness and easy maintenance. By combining an efficient impeller intake pump with a powerful centrifugal discharge, the crown head establishes the standard for dependability.

The crown head's efficiency is due not only to its high performance standards, but also to its easy-to-use, low maintenance design. For example, the built-in deodorant system not only deodorizes the bowl with every flush, but also lubricates the crown head's working parts.

Front access to the macerator, a removable intake pump and a motor cover make the crown head exceptionally simple to maintain by offering quick and easy access to the components.

All these features combine to make the crown head an industry standard that is famous for its powerful centrifugal maceration and is ideal for treatment systems or holding tanks.

For more information contact:

Raritan Engineering Company Inc.
530 Orange Street
Millville, NJ 08332, USA
Telephone: 856-825-4900
Fax: 856-825-4409
e-mail: info@raritaneng.com


raritaneng.com

Southern Plant and Office
3101 SW 2nd Avenue
Ft. Lauderdale, FL 33315 USA
Telephone: 954-525-0378
Fax: 954-764-4370



Sample Installation

crown head™ with Lectra/San® and Vented Loops

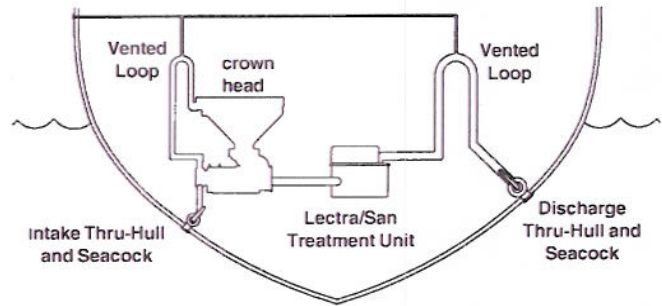

At or Below Waterline Installation Shown

Product Models

C Crown head	White bowl, marine-size (standard)	Straight Discharge (standard)	12	Specify Voltage
	W White, bowl household-style		9 90° Discharge	

To order the correct unit for your installation make one selection from each column above.

Model sample:

C912 - Crown Head, white bowl marine-size, 90° discharge, 12V

Additional parts that are needed for installation: fuses or circuit breakers, wiring, hose clamps, four stainless steel mounting bolts (minimum 1/4" [6mm]) or lag screws and washers, 1 1/2" (38 mm) I.D. sanitation hose, and 3/4" (19mm) I.D. sanitation hose.

Specifications

Units Voltage	Amp. draw @ nominal voltage
12 VDC	36
24 VDC	20
32 VDC	15

Approximate Shipping Weight: 50 lbs (23 kg)

Crown Head Exchange Policy

Raritan Engineering Company, Inc. provides a trade-in discount on newly remanufactured units when the old unit is returned to the factory. These exchanges are subject to availability; contact Raritan Technical Support for details.

L1005 0206kgs

THE MOST DEPENDABLE NAME ON THE WATER