

PURASAN™



NEW Purasan can now be used with most marine toilets

Onboard sewage treatment device for fresh and brackish waters. Neutralizes waste, making it sanitary and safe for boaters and marine life

Benefits

- U. S. Coast Guard approved Type I Marine Sanitation Device for vessels up to 65 feet in length - can be used with most marine toilets
- Treats waste in fresh and brackish water applications
- Electronically controlled, two minute treatment cycle
- Toilet and treatment cycle can be activated with one button
- A single tablet cartridge can be used for many treatment cycles
- One Purasan can be installed with two toilets
- Low power consumption
- Neutralizes bacteria in wastewater
- Easy to change tablet dispenser
- Quiet operation
- Easy to clean and maintain
- Alleviates need for holding tanks
- Each unit is assembled by hand, individually tested and backed by Raritan's one-year Limited Warranty and legendary technical support team

Options


- Available in 12, 24, 32V DC

Raritan products are chosen by powerboat, sailboat, houseboat, and RV owners and manufacturers the world over for their dependability, environmental responsibility, simplicity of installation, operation, and maintenance. The product line includes house-hold style toilets, marine toilets, marine sanitation devices and systems, cleaning products, icemakers, water heaters, and rudder angle indicators.

To view our complete line, to obtain installation and servicing guides, visit raritaneng.com.

A GENIUS FOR WATER IN ALL ITS FORMS

PURASAN™

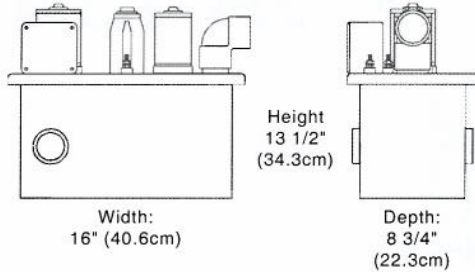

Approximate Shipping Weight: 22 lbs (10 kg)


Basic requirements for the PURASAN's installation involve both treatment tank and tablet dispenser assemblies. The treatment tank must be located within 6 feet (1.8 m) of the toilet, with the discharge of the tank below the level of the discharge of the toilet. Installation must be on a level surface, and a vented loop is required. The tablet dispenser assembly must be located 15 inches (37.5 cm) above the treatment tank.

The push button switch on the PURASAN's control panel can be wired to for single button operations that will flush the toilet and activate the treatment cycle.


Model Options

PURASAN is available in 12, 24, or 32 V DC. The models are PST*02 is for use with raw water intake toilets and the PST*03 is for use with pressurized freshwater or dual toilet installations. (* specify 12, 24 or 32)

Sample Installation with raw water intake toilet:

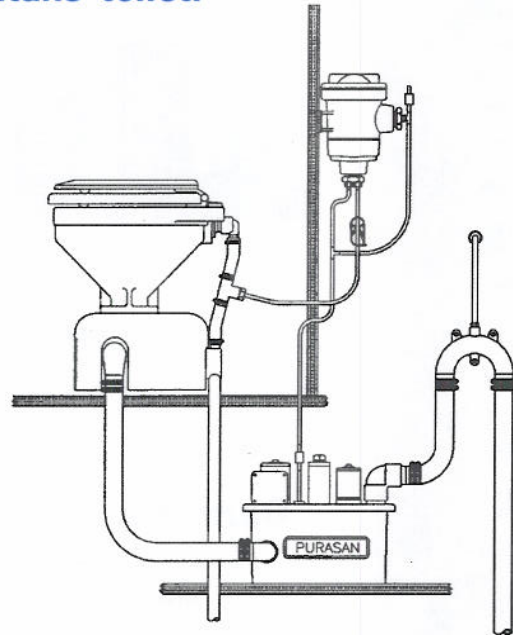

Sample Installation with onboard pressurized freshwater:

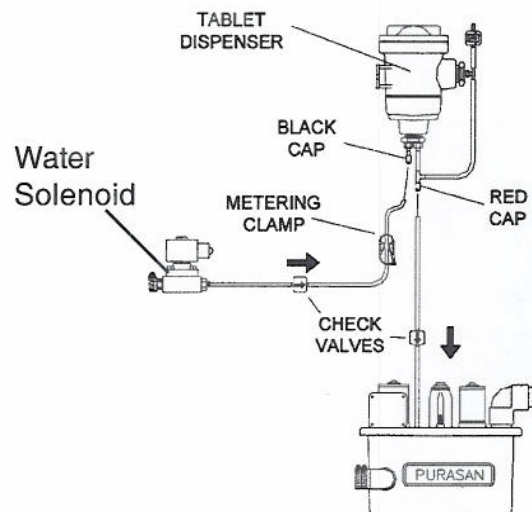

Developed at the request of Crown Head owners, the PURASAN is ideal for use with any of Raritan's macerating toilets in fresh water applications. A single tablet cartridge is placed in the tablet dispenser and lasts for several hundred treatment cycles.

Maceration and chlorination of waste is the most effective known method of treatment and eliminates the need for holding tanks.

L1011 0505kgs



For more information contact:

Raritan Engineering Company Inc.
530 Orange Street
Millville, NJ 08332 USA
Telephone: 856-825-4900
Fax: 856-825-4409
e-mail: info@raritaneng.com

raritaneng.com

Southern Plant and Office
3101 SW 2nd Avenue
Ft. Lauderdale, FL 33315 USA
Telephone: 954-525-0378
Fax: 954-764-4370

A GENIUS FOR WATER IN ALL ITS FORMS