



The Most Dependable Name on the Water



PURASAN™ EX2

Improvements

- New simplified design for chlorine dispensing
- Space saving controller footprint
- Water valve isolated to protect sensitive electronics



Features & Benefits

- U. S. Coast Guard approved Type I Marine Sanitation Device eliminates the need for on board holding tanks
- Electronically controlled, two minute treatment cycle makes treatment quick and efficient
- System can be configured to cycle automatically when toilet is flushed
- Treats waste in fresh, salt and brackish water environments
- Low power consumption
- Quiet operation
- Each unit is assembled by hand, individually tested in the USA
- Backed by Raritan's one-year Limited Warranty and legendary free lifetime technical support



Improved Dispenser Design

Onboard sewage treatment device legal for use in any area not considered a Federal NDZ. Neutralizes waste, making it sanitary and safe for boaters and marine life


Options

- Available in 12 and 24V DC
- Retrofit kits are available for older models

Raritan products are chosen by powerboat, sailboat, houseboat and RV owners and manufacturers the world over for their dependability, environmental responsibility, simplicity of installation, operation and maintenance. The product line includes house-hold style toilets, marine toilets, marine sanitation devices and systems, cleaning products, icemakers, water heaters and rudder angle indicators.


To view our complete line as well as obtain installation and servicing guides: visit www.raritaneng.com

PURASAN™EX2

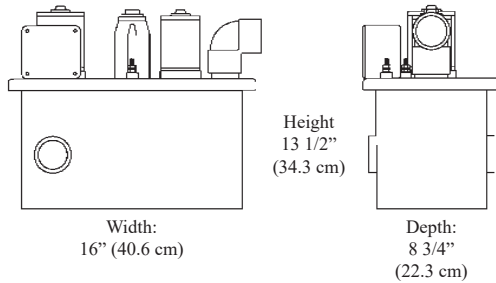

Approximate Shipping Weight: 31 lbs (10 kg)

Sample Installation Diagram

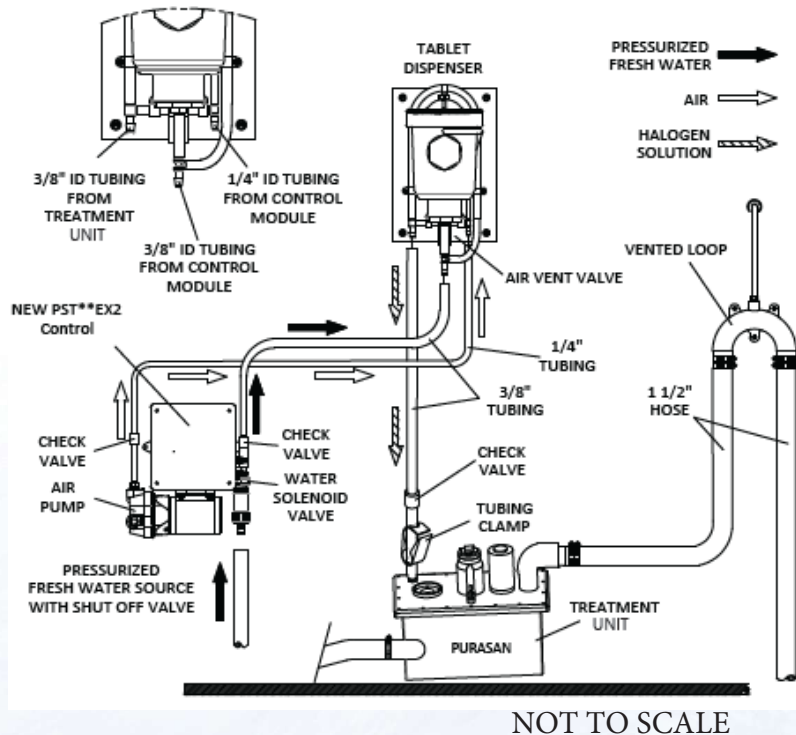

Improvements

The original Purasan has remained relatively unchanged until now. The most notable change is the indicator for the tablet dispenser. The new PURASAN™EX2 will notify the user that the tablet cartridge is low .

Sample Installation:

Basic requirements for the PURASAN™EX2's installation involve both treatment tank and tablet dispenser assemblies. (The treatment tank must be located within 6 feet (1.8 m) of the toilet, with the discharge of the tank below the level of the discharge of the toilet.) Installation must be on a level surface. The tablet dispenser can now be located anywhere but must be mounted to allow for easy access while adding tablets.

The Start/Stop button on the PURASAN™EX2's control panel can be wired to for single button operation that will flush the toilet and activate the treatment cycle.

Replacement tablets are supplied in a convenient resealable container for safe storage. The system control panel will automatically alert you when the tablet level is running low. Simply add up to two tablets for continued trouble-free operation. Each tablet will last approximately 50 treatment cycles.

Control:

The control eliminates the need to adjust a clamp for water metering, timing is fully programmable on the control, a warning light will notify you to check the motors or Tablet Dispenser.

Model Options

PURASAN EX2 is available in 12 or 24 VDC. To upgrade to the EX2 version from the EX version:

Upgrade Kits:

PST12EXRFK

PST24EXRFK



For more information contact:
Raritan Engineering Company Inc.
530 Orange Street
Millville, NJ 08332, USA
Telephone: 856-825-4900
Fax: 856-825-4409
e-mail: info@raritaneng.com